



UGAP 2018

1. ULUSLARARASI GAP TARIM VE HAYVANCILIK KONGRESİ
25 - 27 NİSAN 2018

HARRAN ÜNİVERSİTESİ - ZİRAAT FAKÜLTESİ - OSMANBEY YERLEŞKESİ - ŞANLIURFA

1ST INTERNATIONAL GAP AGRICULTURE AND LIVESTOCK CONGRESS
APRIL 25 - 27, 2018

HARRAN UNIVERSITY - FACULTY OF AGRICULTURE - OSMANBEY CAMPUS - SANLIURFA - TURKEY

BİLDİRİLER KİTABI

PROCEEDINGS BOOK



ISBN 978-975-7113-65-2



UGAP 2018



**1st INTERNATIONAL GAP AGRICULTURE AND
LIVESTOCK CONGRESS
PROCEEDINGS BOOK**

**25-27 APRIL 2018
ŞANLIURFA-TURKEY**

Editorial Board

Prof. Dr. Turan BİNİCİ
Assoc. Prof. Dr. Erdal SAKİN
Assoc. Prof. Dr. Osman ÇOPUR
Asist. Prof. Dr. Gonca ÖZMEN ÖZBAKIR
Res. Asist. M. İlhan ODABAŞIOĞLU
Res. Asist. Eray ŞİMŞEK

Book Cover Design

Lect. Haldun ÖZBUDUN

This proceedings book includes original papers sent to the 1st International GAP Agriculture and Livestock Congress and their scientific content is the responsibility of the authors.

ISBN: 978-975-7113-65-2

CONTENTS

	Page Number
Investigation of Some Pathogenic Bacteria of Chicken Meat Presented for Sale in Erzurum.....	1-9
Salt Stress on Grapes (<i>Vitis</i> spp.).....	10-17
The Effects of Different Shading Levels on Yield and Quality of Some Table Grape Varieties...	18-30
The Effects of Different Sowing Times on the Flowering and Grain Growth Period of <i>Pisum</i> Genetic Resources.....	31-37
Comparison of Different Methods to Determination of Bulb Dry Skin Color in Onion.....	38-45
Effect of Different Sowing Dates and Gibberellic Acid on Some Emergence Characteristics of <i>C. glomerata</i> L. subsp. <i>hispidata</i> (Witasek) Hayek Seeds.....	46-51
Histochemical and Immunohistochemical Investigation on Trophoblasts Characteristic in Different Stages of Pregnancy in Rats.....	52-57
The Determination of Total Phenolic Contents of İsmailağa Apricot Variety.....	58-60
The Effect of Different Drying Methods on Antioxidant Activity of Malatya İsmailağa Apricot Variety.....	61-66
Determination of Antioxidant Activity of Malatya İsmailağa Apricot Variety.....	67-71
Some Properties of Fermented Milk Product Produced by Using Chickpea While Storage.....	72-80
Some Quality Characteristics of Karacadağ Rice.....	81-89
Use of Quinoa (<i>Chenopodium quinoa</i> Willd.) Flour in Chicken Meatball Production.....	90-95
Local Cheese Varieties in the Mediterranean Region.....	96-101
Dietary Fiber and Cereals.....	102-111
Effects of Inbred Maize Lines on Herbicides.....	112-118
Comparing the Effects of Natural Events such as Frost and the Effects of Several Diseases and Pests.....	119-126
The Effect of Supplemental Irrigation on the Yield and Quality of Wheat in Semi-arid Conditions.....	127-134
Climate Change, Water Resources and Food Safety.....	135-143
Using Programmable Logic Control (PLC), Flow Key Curve, Pressure and Ultrasonic Sensors to Measure Water Flow Rate in Open Channels.....	144-149
Possibilities of the Geophysical Method for the Establishment of Water Filtration from Regulating Irrigation Basins.....	150-153
A New Machine Design and Characteristics on Struggle via Burning Weeds Between Rows.....	154-159
Determination of Livestock Waste-Based Biogas Energy Potential of Kayseri Province.....	160-164
The Use of Plant Waste from Agricultural Crops for the Production of Pyrolysis Gas.....	165-166
New Approaches in Biofuel Production “Biodiesel Production from Microalgae”.....	167-170
Effects of Abiotic Stress Conditions on Plants.....	171-175
Effect of Nitrogen Fertilizer to yield of Pomegranate (<i>Punica granatum</i> L.) on Harran Plain Conditions.....	176-180
Effects of Different Foliar Zinc Dozes on Phenology, Yield and Some Quality Parameters of Olive.....	181-187
Egg Yield and Hatchability Characteristics of Native Geese in The Kars Region.....	188-193
Feeding the Transition Dairy Cow: I. Physiologic, Hormonal, Metabolic and Immunological Changes and Nutrient Requirement of Dairy Cow During This Period.....	194-200
Feeding the Transition Dairy Cow: II. Metabolic Disorders Seen in This Period and Prevention Through Feeding.....	201-209
A Study on the Usability of Entomopathogenic Nematodes in Combating of the Great Wax Mouths (<i>Galleria mellonella</i>).....	210-212
Siverek in the District is Consumed by the Plants Collected from Nature.....	213-218
The Effect of Different Nitrogen Doses on Seed Yield and Some Agronomic Characteristics of Soybean Grown as a Double Crop.....	219-226
A Study on Plant Characterization of Some Annual Medic Species Grown Naturally in Middle Black Sea Region.....	227-231
Determination of Morpho-Agronomic Traits of Some Annual Medic Species Grown in Natural Flora of the Middle Black Sea Region.....	232-238
Determination of Phenological Characteristics of Some Annual Medic Species Grown Naturally in Middle Black Sea Region.....	239-244
Effects of Gibberellic Acid (GA ₃) Application Periods on Tulip Cultivation.....	245-250
The Effect of Different Culture Containers Depth on the Yield and Quality of Radish (<i>Raphanus sativus</i>) Microgreen Cultured in Floating and Substrate Culture.....	251-256
Use of Essential Oil as an Alternative to Chemical Protective in Postharvest Storage.....	257-259



Possibilities of the Geophysical Method for the Establishment of Water Filtration from Regulating Irrigation Basins

Olha ORLINSKA^{1*}, Natalia MAKSIMOVA¹, Hennadii HAPICH¹, Irina CHUSHKINA¹,
Dmytro PIKARENIA², Vladislav NAKONECHNY²

¹Dnipro State Agrarian and Economic University, Dnipro, Ukraine

²Dneprovsky State Technical University, Kamyanske, Ukraine

*Corresponding author: nippel@rambler.ru

Abstract

There are results of field research using the geophysical method of natural impulsed electromagnetic field of the Earth (NIEMFE), established zones of water filtration from the regulating irrigation pool, determined water losses due to filtration. It is shown that it is possible using the NPEMFE method to reliably and quickly allocate water filtration zones through the ground-based dams of water basins of reclamation systems. It is allow to quickly taking measures to reduce water losses and deteriorate the ecological state of the underground hydrosphere around the pools of water-reclamation purpose.

Key Words: Regulating irrigation pool; Method of natural pulsed electromagnetic field of the Earth (NPEMFE); Water losses due to filtration; Geophysical research

Introduction

Saving and increase soil fertility is perhaps the most important task of agriculture. One of the factors of fertility is the timely reclamation, in particular the creation of the necessary moisture reserves in the soils. For this purpose, an irrigation system has been constructed consisting of pumping stations, main and distribution water pipes, regulating pools, where water is accumulated.

Regulating irrigation pools are excavations in the soil, have the shape of an inverted cut square pyramid (Figure 1). On all sides, they are

surround by enclose ground-based dams. In the majority of the pools are equipped with waterproofing to prevent water filtration, but more often there are those where she is not provided for constructively. For waterproofing, a protective polyethylene membrane is applied, which is placed on the bottom and sides of the pool, and is loaded with concrete slabs. Between slabs are waterproofed with concrete or resin, bitumen, etc. This example of preventing filtration is relatively inexpensive and very effective, especially in the first few years of exploitation of a hydraulic engineering structures.



a



b

Figure 1. Appearance of the regulating irrigation basin (*a. empty; b. filled*)

Over time, there is a waterproofing violation and the development of filtration begins. The reasons for this violation are several, in many cases they relate to the exploiting mode. The main thing is that almost all regulating pools are filled with water in the spring and empty in autumn, they are all without water during the whole winter. Freezing weathering leads to the destruction of the material, which is located in the interstitial space of concrete slabs, which revolve the insides of the pool – it loses mechanical properties, becomes brittle and loose. Plates go down, strip off the protective membrane and violate the waterproofing.

The water filtration zones of regulating irrigation pools are divided into visible and hidden. The position of the first one is established unambiguously on the visual grounds. Hidden areas are determined by conducting special research. At present, the following methods for diagnosing the technical condition of hydraulic engineering constructions are known: geodetic, geological, geophysical and hydrogeological.

The most common geophysical methods of diagnostics are: electrometric, seismic acoustic, thermometric, methods of remote sensing (photography, infrared, radio shooting) and others. These methods are very expensive and time-consuming. So the search for new expressive and inexpensive survey methods is an actual task for this time.

Consider the possibilities of the geophysical method of the natural impulsive electromagnetic field of the Earth to establish water filtration zones through the ground-based dams.

Materials and Methods

The geophysical method of the natural impulsive electromagnetic field of the Earth (NIEMFE) has a wide application in the search of water, ore minerals, areas of increased filtration and fracture and it has well established itself on many geological and engineering objects (Pikarenia, Orlinska, 2009). The physical content is based on the generation of an impulsive electromagnetic field by rocks or fragile artificial materials that are under the influence of mechanical compression or stretching forces.

When changing the mechanical voltage (load) is jump-like, the amount of electromagnetic

impulses (EMIs): an increase in load leads to an increase in the number of EMIs, and at the moment of destruction of the solidity of the rock and the formation of cracking or scraping or separation, the number of impulses drops sharply and remains very small.

In case of filling cracks with water, there is even more EMI absorption. According to the analysis of the schemes of the number of impulses NIEMFE in the body of the hydraulic engineering constructions and adjoining areas it is possible to allocate areas of a differently stressed state, to predict the areas of flooding, soaking, water filtration and the development of dangerous engineering and hydrogeological processes. In other words, absorption of electromagnetic impulses occurs in watered zones and areas of decompression, which is reflected by a decrease in the impulse flux density of the magnetic component of NIEMFE.

The fields of NIEMFE also experience the influence of external sources of electromagnetic emission, both natural (magnetic perturbations, activity of the Sun) and technogenic origin (transmission lines, radio and cellular communications, etc.). This leads to the fact that the NIEMFE field is unstable in time, it complicates the interpretation of results and impedes the widespread implementation of the method. But high performance, high-speed field-shooting and low cost of work makes the method very attractive for detecting filtering areas.

For order to verify the validity of the proposed method, the research of water filtration areas in the regulating irrigation basin was conducted in Dnipropetrovsk region (Ukraine) in 2013 and 2017 years.

The pedestrian survey was carried out along the perimeter of the pool in the profile version with a distance between the profiles of 3 m, between the points of observation on the profile of 3 m. The length of the profile was 110 m, the number – 5 profiles on each board (all 20 profiles with a total length of 2200 m). The microprocessor indicator of the electromagnetic field (Ukraine) was used for work. It consists of a block of registration and three antennas, which measure the amount of electromagnetic impulses in a time interval, when equipped, the device is

shown in Figure 2. Time to conduct research – 4 hours.




Figure 2. Operator with microprocessor indicator of an electromagnetic field with three antennas during field survey

Results and Discussion

According to the results of the survey of the density of the magnetic component of the

impulsed electromagnetic field of the Earth with the package of programs "Golden Software Surfer 8" a map-diagram (Figure 3) was constructed and its interpretation was executed, based on the effect of intense absorption of pulses of NIEMFE by essentially watered rocks or engineering structures.

On the maps of the area of the decrease in the flux density of the impulses of the magnetic component of the NIEMFE are identified as absorption zones corresponding to the filtration areas. The shape of the isoline and the general drawing of the NIEMFE field allows to separate these zones from each other and determine their size and reach at the investigated object. It should be noted that the NIEMFE method itself is qualitative (and not quantitative), so the precisely the relative values – an increase or decrease in the number of impulses for a certain time of measurement – come to the foreground.

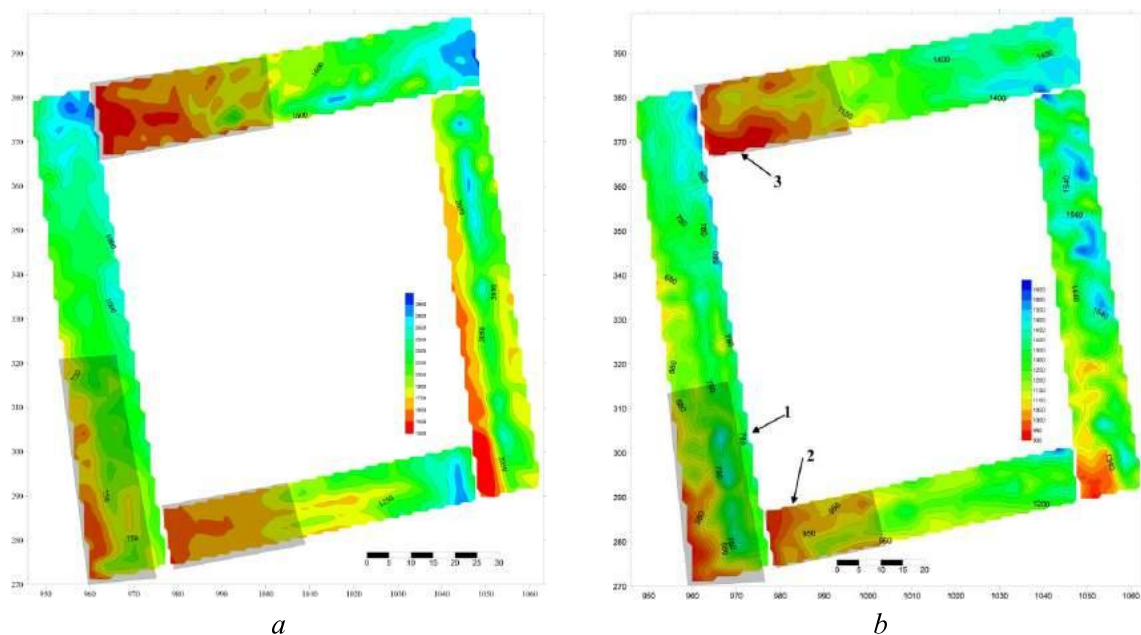

The hatchet shows the position of the signal absorption zone (filtration zone) and shows their numbers
The color scale characterizes the density of the magnetic component flow in an impulse/second
The coordinate system is a conditional rectangular, metric

Figure 3. Map-scheme of the impulse flux density of the magnetic component of NIEMFE at the regulating irrigation pool (a. 2013, b. 2017)

As a result of the interpretation, three zones of signal absorption of NIEMFE are distinguished. The first two (No. 1 and No. 2) are located in the area of the joining of the western and southern boards, presumably, it is one filtration zone. The third zone is allocated

on the north board. The width of the filtration zone No. 1 is 45-48 m, the filtration zone No. 2 is 10 m, and the filtration zone No. 3 is 33 m.

Comparison of surveys in 2013 and 2017 (Figure 3) shows that the position of the zones for almost 4,5 years has not change

significantly, although there are changes in the field pattern and in the absolute number of impulses (see the color scales in the figures). This gives grounds for asserting that the filtration zones are allocated reliably and objectively.

Due to the size of the filtration zones, it is possible to calculate the loss of water from the regulating irrigation pool through the enclosure dam.

Thus, it can be seen that, depending on the filling of the basin (it's depth), monthly water losses only from the filtration will be from 8000 to 12000 m³. Taking into account that the exploitation of the pools take to place from April to November, the loss of fresh water will be from 35000 to 45000 m³. It should be noted that this pool belongs to the category of small, its volume is 12000 m³.

Conclusions

As a result of comparing geophysical research of different years the method of the natural impulsed electromagnetic field of the Earth (NIEMFE), it is established that using this method is possible to reliably and quickly allocate zones of water filtration through fencing of dams of regulating water pools of reclamation systems. This allows to quickly take measures to reduce water losses and deteriorate the ecological state of the underground hydrosphere around the pools.

References

- Pikarenia, D.S., Orlinskay O.V., 2009. Experience in applying the method of the natural impulsed electromagnetic field of the Earth (NIEMFE) for solving engineering-geological and geological problems. – Dnipropetrovsk: "SVIDLER", 120 p.